



# CERMIPRIM UNIVERSEL

ADHESION PRIMER FOR NEW WORK AND RENOVATION – POROUS AND CLOSED SUBSTRATES



 Translucent pink liquid

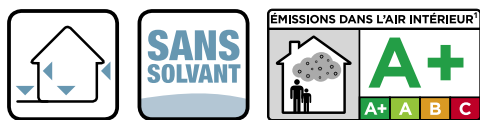

## DESCRIPTION

Versatile primer compatible with a variety of new and renovated substrates. CERMIPRIM UNIVERSEL evens out substrate porosity and improves the adhesion of mortars on closed substrates. Easy to apply, solvent-free and aqueous, CERMIPRIM UNIVERSEL is coloured so that it is easy to see where it has been applied.

## ADVANTAGES

- Improves mortar adhesion
- Evens out substrate porosity
- Single-component
- Ready to use
- Solvent-free

## WHERE TO USE

Porous or closed **SUBSTRATES** as defined by the relevant building codes (DTU/CPT in France)

	INTERIORS		EXTERIORS	
	WALLS	FLOORS	WALLS	FLOORS
Concrete	x	x	x	x
Aerated concrete	x	x	x	x
Cement coatings	x	x	x	x
Traditional or fluid cement screeds		x		x
Anhydrite screed		x		
Lightweight screed		x		
Dry screed		x		
Plasterboard	x	x		
Plaster	x			
Plaster blocks	x			
Terracotta masonry	x	x	x	
Heated floors		x		
Wood floors (French classes CTBH, CTBX, OSB3)	x	x		
Tile	x	x		
Semi-flexible plastic tiles		x		
Traces of glue		x		
Asphalt screed		x		
Floor paint		x		
Other substrates	Contact us for information			

## HOW TO USE

Note: The following is a typical description of application. If your site has other parameters, contact our Technical Department.




Application temperature



Check the substrate



APPLY WITH BRUSH OR ROLLER



150 à 300 g/m<sup>2</sup> environs



Clean with water



Foot traffic after 30 to 120 min

## PREPARATION STEPS

For renovation, depending on the work or finish to follow, test to confirm good adhesion on the existing covering, according to the relevant building code (CPT in France).

## TOOLS

Roller or flat brush

## SURFACE PREPARATION

The surface should be sound, clean, solid, free of dust (sweep and vacuum), not leach moisture, rough, and be free of form oils and poorly adherent materials.

To achieve this, scrape, brush, remove dust, clean, etc., and reseal if necessary.

Make the necessary repairs after, for instance, having removed any unsound tiles.

Sand paint or varnish to roughen and remove unsound paint.

Make sure wood is stable and that panels and slats are attached by screws.

## PRODUCT PREPARATION

The product is ready to use. Do not dilute.

## APPLICATION

Apply an even, regular, thin coat using a roller or brush, watching for absorption. Depending on the humidity conditions and the nature of the substrate, allow to dry for 30 min to 2 hours before application.

## FINISH

Levelling screed, mortar, damp-proofing (SEL) or waterproofing (SPEC) systems must be applied on a dry product, at most 24 hr after applying the primer and without foot traffic in the room.

## APPLICATION CONDITIONS

Make sure the area is dry and draught-free.

Application temperature: 5-35°C

Drying time<sup>(1)</sup>: 30 min-2 hours

Protect the application area from rain, frost and high temperatures.

<sup>(1)</sup> Values obtained at 23°C and 50% RH in the laboratory. Drying times are shorter at higher temperatures and longer at lower temperatures.

## CLEANING AND MAINTENANCE

Clean tools with water before they dry.

## COMMENTS

Shake the package to mix before use.



## TECHNICAL CHARACTERISTICS

### COMPOSITION

Aqueous polymer emulsion of synthetic resins, pigments and specific admixtures.

### COVERAGE

0.150 to 0.300 l/m<sup>2</sup> depending on the nature and roughness of the substrate.

### TECHNICAL CHARACTERISTICS

Non-flammable

Density: 1.05

## PACKAGING

2 litre can: 320 cans per pallet (in boxes of 10)

5 litre can: 128 cans per pallet (in boxes of 4)

15 litre can: 24 cans per pallet

1000 litre drum

## STORAGE & SHELF LIFE

Storage & shelf life: 1 year in the original packaging, protected from frost and sunlight.

## SAFETY INSTRUCTIONS

- EMISSIONS IN INDOOR AIR (1): Information on the level of volatile substances emitted in air indoors, presenting a toxicity risk by inhalation, on a classification scale ranging from A+ (very low emissions) to C (high emissions).
- Consult the safety data sheet at [www.quickfds.fr](http://www.quickfds.fr) or ask CERMIX France for it.
- Always wear personal protective equipment that meets current guidelines and regulations.
- Dispose of the contents and container in accordance with local/regional/national/international regulations.

We reserve the right to update this technical document. It is the user's responsibility to always check whether there is a more recent version available at our website, [www.cermix.com](http://www.cermix.com). It is the responsibility of the person using the products to ensure that the products are compatible and suitable for the planned use. Prior tests may be carried out to confirm that products behave as expected.